COMMUNICATIONS SPEAKER

SP-50/50B

INSTRUCTION MANUAL

KENWOOD

KENWOOD CORPORATION

* Before using your SP-50/50B, check that it is supplied with the following mounting parts:

■ ACCESSORIES

Mounting bracket (J21-2799-13)	1 pc.
Cushion (G13-0680-04)	1 pc.
Tapping screw (ø4 x 8) (N87-4008-41)	4 pcs.
Flat head tapping screw (ø4 x 8) (N88-4008-41)	2 pcs.
Round head screw (ø4 x 10) (N30-4010-41)	2 pcs.
Hex. head nut (ø4) (N10-2040-41)	2 pcs.
Installation manual (B50-4080-18)	1 copy

■ SPECIFICATIONS

Speaker size:	77 mm
Maximum input:	2.5 watts
Impedance:	8 ohms
Frequency response:	300Hz – 4kHz
Dimensions:	W125 x H83 x D36.5 mm 4-29/32" x 3-9/32" x 1-7/16"
Weight:	300g 0.66 lb.

■ INSTALLATION

Example 1-1



Example 1-2



Example 2-3



Example 2-4



Securing bracket

Example 2-1

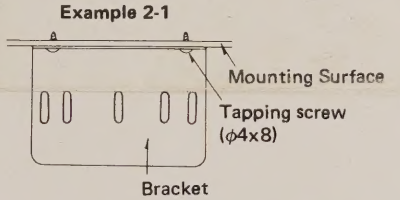

Example 2-2

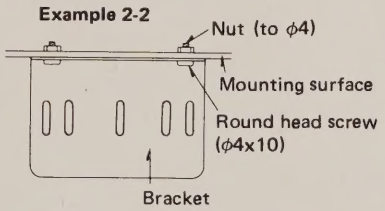

コミュニケーションスピーカ

SP-50/50B

取扱説明書

KENWOOD

株式会社 ケンウッド
KENWOOD CORPORATION

©PRINTED IN JAPAN B50-4080-18(J,K,M)
87/6 5 4 3 2 1 86/12 11 10 9 8 7 6

■ご使用になる前に

ＳＰ－50/50Ｂには、つぎの部品が付属しておりますので、お確かめください。

1．クッション……1個
2．アングル……1個
3．六角ナット(∅4)……2本
4．ナベネジ(∅4×10)……2本
5．タップタイトネジ(∅4×8)……4本
6．サラタップタイトネジ(∅4×8)……2本
7．取扱説明書……1冊

■定　格

使用スピーカー	77mm
公称最大入力	2.5W
インピーダンス	8Ω
周波数帯域	300Hz～4kHz
寸　法	幅125×高さ83×奥行36.5mm
重　量	0.3kg

■取付方法

例1－1



例1－2



スピーカーを取付金具に取付ける方法

例2－3



例2－4



取付金具の固定方法

例2－1

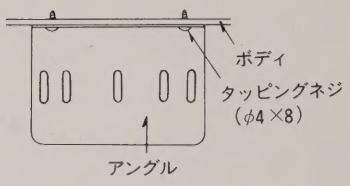

例2－2